

ARITCO PUBLIC LIFT ACCESS



M O R G A N
E L L I S
— L I F T S —

ARITCO PUBLIC LIFT ACCESS

LIFT GLASS




LIFT COLOUR



LIFT DOORS

Doors are installed on each floor with matching frames. Made from galvanised steel with 8 mm toughened laminated glass, they come with clear glazing as standard and optional tint. Available in full or half-height models, hinged left or right and fire doors.

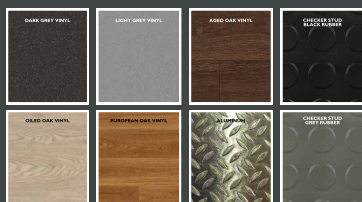

LIFT FLOOR

MINIMUM 2240MM TOP HEIGHT

(1100mm with half height door)

INSTALLATION

Pit needs 50 mm

No pit is required when there is a ramp.

TYPE OF LIFT

Platform lift intended for use in public & commercial environments.



RATED SPEED
Max 0.15m/s
Outside Europe

DRIVE SYSTEM

Patented screw and nut system

2 to 6 floors



NUMBER OF FLOORS


WARRANTY

The screw and nut assembly has a 10 year warranty.




CONTROL FROM CARRIER CONTROL PANEL


Hold to run – press and hold




Carrier size: 900 x 1040
External dim: 1300 x 1160
Rated load: 250 kg / 2 persons




Carrier size: 900 x 1280
External dim: 1300 x 1400
Rated load: 410 kg / 5 persons
Wheelchair: Lone user or type A




Carrier size: 900 x 1480
External dim: 1300 x 1600
Rated load: 410, 500 kg / 5, 6 persons
Wheelchair: A or B with attendant




Carrier size: 1000 x 1280
External dim: 1400 x 1400
Rated load: 410 kg / 5 persons
Wheelchair: Lone user or type A




Carrier size: 1000 x 1480
External dim: 1400 x 1600
Rated load: 410, 500 kg / 5, 6 persons
Wheelchair: A or B with attendant



Carrier size: 1100 x 1480
External dim: 1500 x 1600
Rated load: 410, 500 kg / 5, 6 persons
Wheelchair: A or B with attendant



Carrier size: 1100 x 1580
External dim: 1500 x 1700
Rated load: 500 kg / 6 persons
Wheelchair: A or B with attendant



Carrier size: 1000 x 1980
External dim: 1400 x 2100
Rated load: 500 kg / 6 persons
Wheelchair: A or B with attendant