


ARITCO HOME LIFT ACCESS



M  R G A N
E L L I S
— L I F T S —

ARITCO HOME LIFT ACCESS

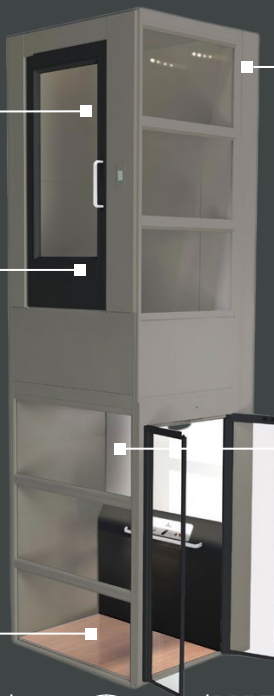

LIFT COLOUR




LIFT GLASS



LIFT DOORS

4 different door types to choose from. Large glass door, double hinged glass door, EI60 fire proof door and half height door.



LIFT FLOOR

CONTROLS

The Aritco HomeLift Access features LED-lit controls, optional Braille buttons, key switch security, voice floor announcements, emergency and alarm systems, and a durable, lit handrail. Designed for accessibility, safety, and ease of use across up to six floors.

MINIMUM 2240MM TOP HEIGHT

(1100mm with half height door)

INSTALLATION

Recessed installation 50 mm below floor or installed directly on the floor with 50 mm ramp.

TYPE OF LIFT

Home lift intended for installation in private homes.

Only to be used in buildings without public access.

POWER SUPPLY

230 V 1-phase
400 V 3-phase



TECHNICAL COMPLIANCE

European Machine directive 2006/42/EC
European standard EN 81-41

DRIVE SYSTEM

Patented screw and nut system (2.2 KW motor)

2 to 6 floors




WARRANTY

The screw and nut assembly has a 10 year warranty.




CONTROL FROM CARRIER CONTROL PANEL


Press and hold to run




Size: 900 x 1040 mm
Rated load: 250 kg / 2 pers.




Size: 900 x 1280 mm
Rated load: 410 kg / 5 pers.
Wheelchair: Lone user or type A




Size: 900 x 1480 mm
Rated load: 410 kg / 5 pers.
Wheelchair: A or B with attendant




Size: 1000 x 1280 mm
Rated load: 410 kg / 5 pers.
Wheelchair: Lone user or type A




Size: 1000 x 1480 mm
Rated load: 410 kg / 5 pers.
Wheelchair: A or B with attendant



Size: 1100 x 1480 mm
Rated load: 410 kg / 5 pers.
Wheelchair: A or B with attendant



Size: 1000 x 1980 mm
Rated load: 500 kg / 6 pers.
Wheelchair: A or B with attendant



Size: 1100 x 1580 mm
Rated load: 500 kg / 6 pers.
Wheelchair: A or B with attendant