

PVE30



Rated Load
159 kg



Panoramic view
360°



Unique Design



Vacuum®
technology



Installation
within 2-3 days



Plug&Play
Single phase 220v



Customizable
finishes



Minimal
maintenance



Eco-friendly




No pit required



Maximum Safety

www.morganellis.co.uk

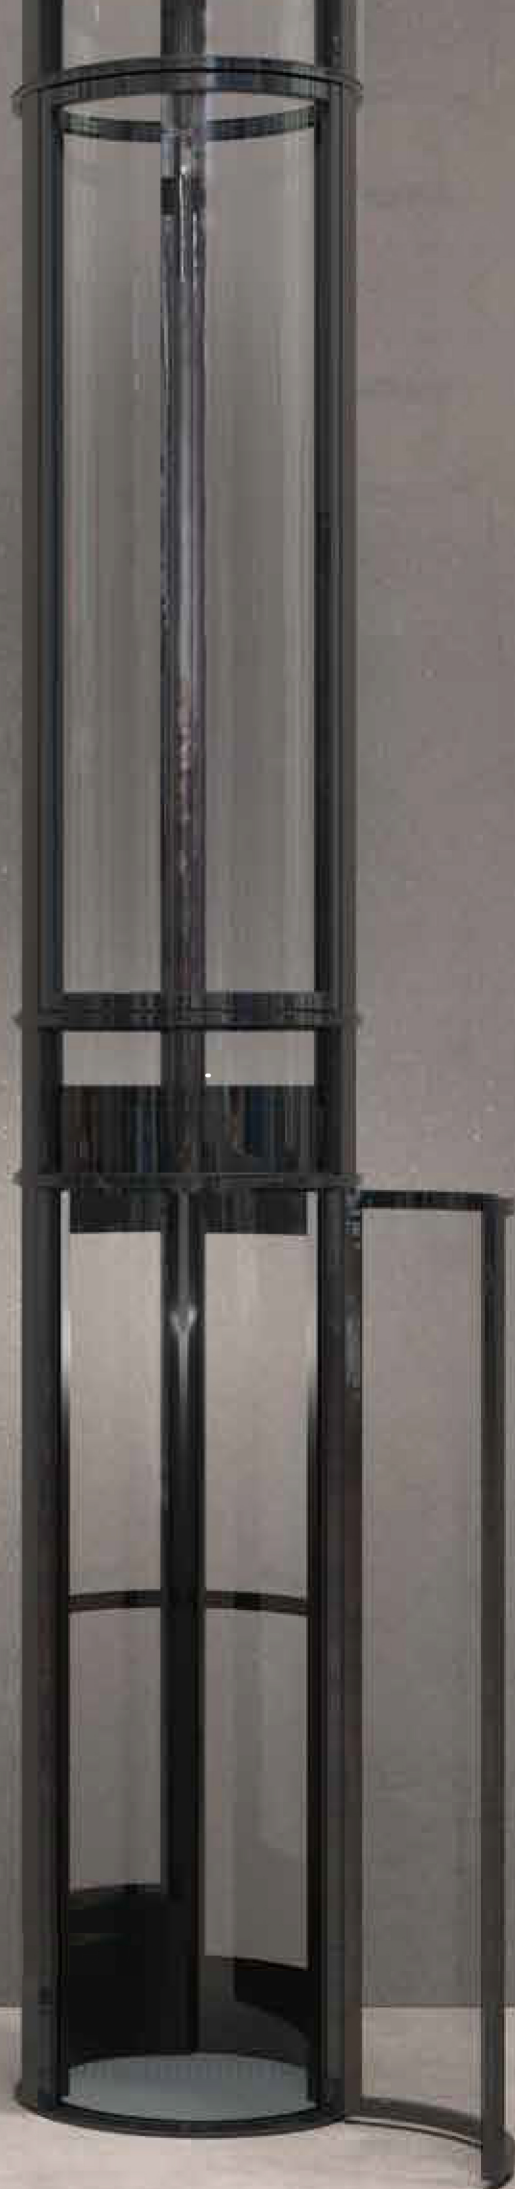

General

External cylinder diameter (mm)	750
Rated load (kg)	159
Speed	<0.15m/s
Stops	2 to 5
Max. Total travel (m)	15

Doors

Door openings	0°
Standard door hinged (from outside the cabin)	Right
Optional door hinged (from outside the cabin)	Left
Automatic Door Opener Available	No
Door height (mm)	1970
Height to top of door closer (mm)	2020

Cabin

Internal cabin height (mm)	2007
Internal cabin diameter (mm)	
without columns	640
between columns	560
Entrance width opening (mm)	508
Electrical circuits with all controls in cabin	24V
Automatic Push (one-touch)	Yes
Foldable cabin seat	No
Wheelchair accessible	No

Safety



Automatic descent in the event of power failure	Yes
Mechanical emergency brakes	Yes
Overload limiting system	Yes
Alarm	Yes
Telephone	Yes
Electromechanical interlocks at each landing	Yes

Installation Requirements

Through floor perforation required diameter (mm)	810
Minimum height at the top floor (mm)	2450
Level floor	Yes

Electrical/Supply

Power supply	Single phase 220V of 3 (Phase, Neutral, Earth) x 4 mm (section each wire)
Max. Power	3kW
Protection required	20A Circuit breaker

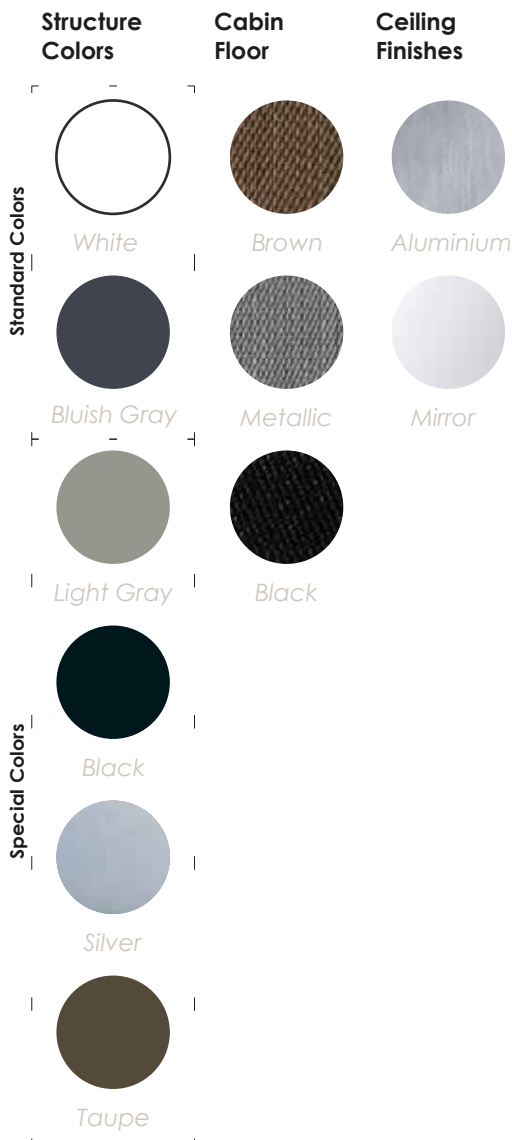

DOOR OPENINGS

