

PVE37



Rated Load
205 kg



Panoramic view
360°



Unique Design



Vacuum®
technology



Installation
within 2-3 days



Plug&Play
Single phase 220v



Customizable
finishes



Minimal
maintenance



Eco-friendly



No pit required



Maximum Safety

www.morganellis.co.uk



General

External cylinder diameter (mm)	933
Rated load (kg)	205
Speed	<0.15m/s
Stops	2 to 5
Max. Total travel (m)	15

Doors

Door openings	0°, 90°, 270° & 180°
Standard door hinged (from outside the cabin)	Right
Optional door hinged (from outside the cabin)	Left
Automatic Door Opener Available	Yes
Door height (mm)	1970
Height to top of door closer (mm)	2025

Cabin

Internal cabin height (mm)	2007
Internal cabin diameter (mm)	
without columns	820
between columns	750
Entrance width opening (mm)	521
Electrical circuits with all controls in cabin	24V
Automatic Push (one-touch)	Yes
Foldable cabin seat	Yes
Wheelchair accessible	Yes, with a special wide reduced wheelchair

Safety



Automatic descent in the event of power failure	Yes
Mechanical emergency brakes	Yes
Overload limiting system	Yes
Alarm	Yes
Telephone	Yes
Electromechanical interlocks at each landing	Yes

Installation Requirements

Through floor perforation required diameter (mm)	990
Minimum height at the top floor (mm)	2450
Level floor	Yes

Electrical/Supply

Power supply	Single phase 220V of 3 (Phase, Neutral, Earth) x 6 mm (section each wire)
Max. Power	5kW
Protection required	25A Circuit breaker

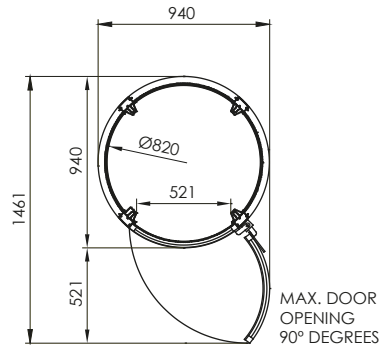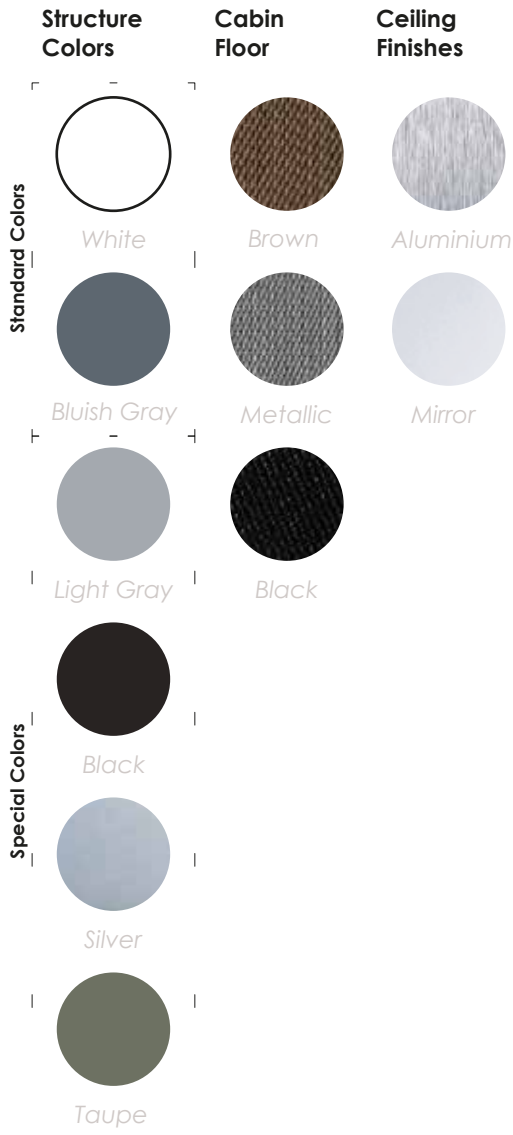

DOOR OPENINGS

