


# PVE52



Rated Load  
238 kg



Panoramic view  
360°



Unique Design



Vacuum®  
technology



Installation  
within 2-3 days



Plug&Play  
Single phase 220V



Customizable  
finishes



Minimal  
maintenance



Eco-friendly



No pit required



Maximum Safety

[www.morganellis.co.uk](http://www.morganellis.co.uk)



## General

|                                 |          |
|---------------------------------|----------|
| External cylinder diameter (mm) | 1316     |
| Rated load (kg)                 | 238      |
| Speed                           | <0.15m/s |
| Stops                           | 2 to 5   |
| Max. Total travel (m)           | 15       |

## Doors

|   |           |
|---|-----------|
| Door openings                                 | 0° & 180° |
| Standard door hinged (from outside the cabin) | Right     |
| Optional door hinged (from outside the cabin) | Left      |
| Automatic Door Opener Available               | Yes       |
| Door height (mm)                              | 2025      |
| Height to top of door closer (mm)             | 2071      |

## Cabin

|  |      |
|--|------|
| Internal cabin height (mm)                     | 2007 |
| Internal cabin diameter (mm)                   |      |
| without columns                                | 1210 |
| between columns                                | 1090 |
| Entrance width opening (mm)                    | 813  |
| Electrical circuits with all controls in cabin | 24V  |
| Automatic Push (one-touch)                     | Yes  |
| Foldable cabin seat                            | No   |
| Wheelchair accessible                          | Yes  |

## Safety

|   |     |
|---|-----|
| Automatic descent in the event of power failure | Yes |
| Mechanical emergency brakes                     | Yes |
| Overload limiting system                        | Yes |
| Alarm   | Yes |
| Telephone                                       | Yes |
| Electromechanical interlocks at each landing    | Yes |

## Installation Requirements


|  |      |
|--|------|
| Through floor perforation required diameter (mm) | 1389 |
| Minimum height at the top floor (mm)             | 2450 |
| Level floor                                      | Yes  |

### Electrical/Supply

|                     |  |
|---------------------|--|
| Power supply        | Single phase 220V of 3 (Phase, Neutral, Earth) x 10 mm (section each wire) |
| Max. Power          | 6kW  |
| Protection required | 32A Circuit breaker  |

## Structure

## Colors



White

## Cabin Floor




*Brown*

## Ceiling Finishes



Aluminium

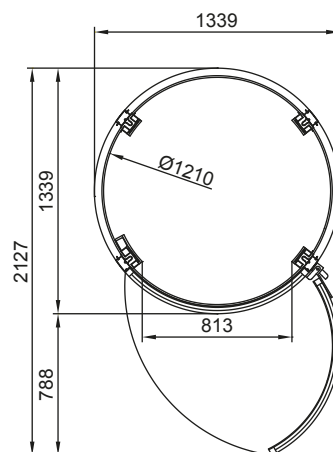

MAX. DOOR  
OPENING  
90° DEGREES

## DOOR OPENINGS

